



4N PRODUCTS **TAPPING BANDS**



Personalised service, distribution across the Asia Pacific region with a comprehensive product range to match, you're in expert hands.

TABLE OF CONTENTS

Tapping Bands _____	01
Advantages _____	02
Tapping Bands Series 1 _____	03
Tapping Bands Series 2 _____	04
Tapping Bands HDPE _____	05




TAPPING BANDS WITH SIZES FROM DN40 TO DN300 AND WITH OPERATING PRESSURES UP TO PN 16.



The 4N Products range of tapping bands are manufactured and certified to Australian and New Zealand standards. They are suitable for potable water, recycled water, irrigation and below ground installations. Colour coded for easy identification for Potable Water, Recycled Water and HDPE. Suitable for use on AC, DICL, PVC and HDPE pipes, pressure and non-pressure applications.

Advantages of the 4N Tapping Band

- Quick and easy to install
- Colour coded for identification
- Positive stop to prevent overtightening
- Superior corrosion protection

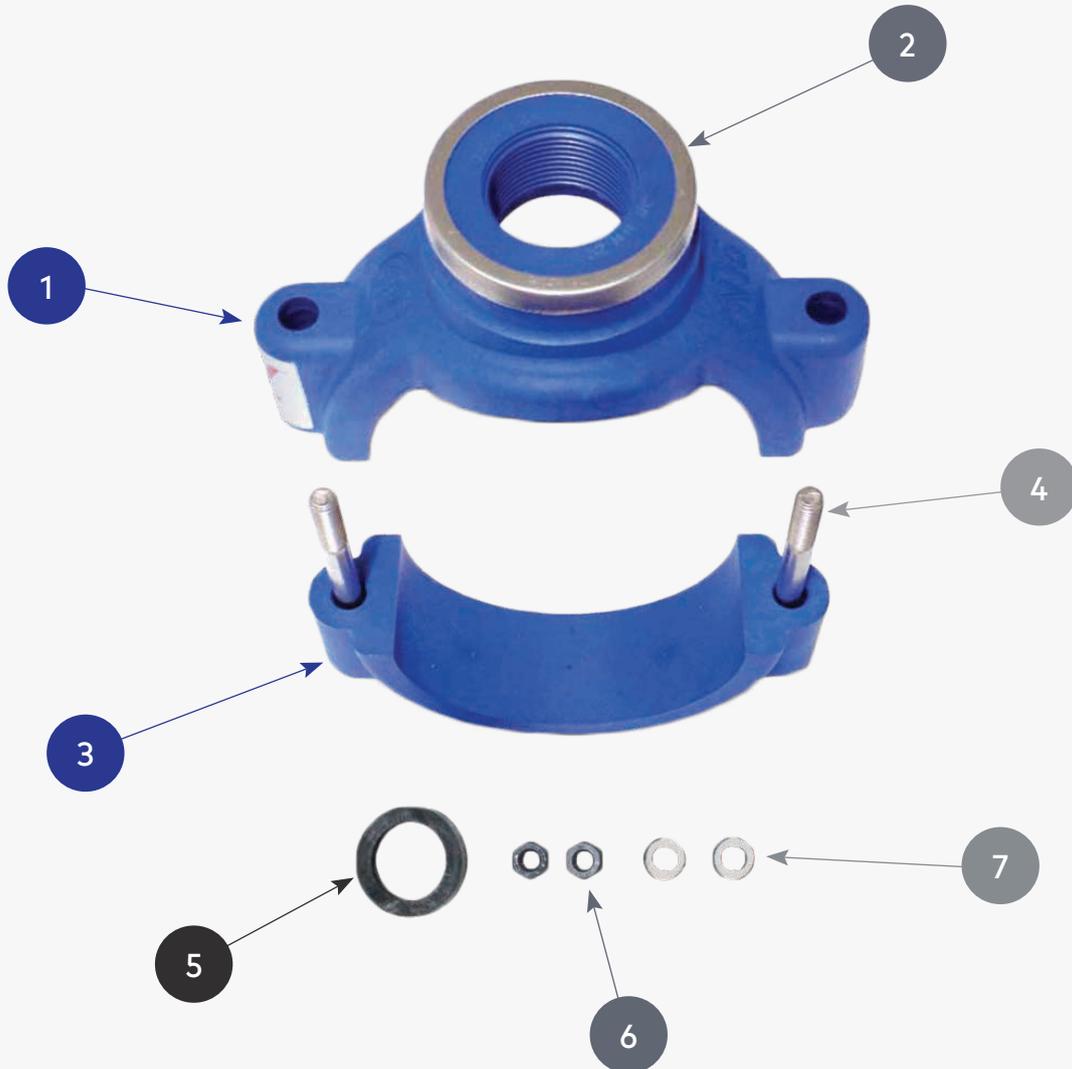

1	TOP HALF TAPPED	Nyrol
2	RE-ENFORCEMENT BOSS RING	Stainless Steel 316
3	BOTTOM HALF	Nyrol
4	BOLTS	Stainless Steel 316
5	E-LIP/O-RING SEAL	Rubber EPDM
6	NUTS	Stainless Steel 316, Molybdenum Delta Seal
7	WASHERS	Stainless Steel 316

SERIES 1 TAPPING BANDS

Design Advantage

- Quick and easy installation
- Positive stop to prevent overtightening
- Superior corrosion protection



Technical Detail

Range	DN40 to DN300
Pressure	PN16
Temperatures	40°C
Applications	Irrigation, Commercial Plumbing
Pipe Material	PVC-U
Colours	White

Compliance

- AS/NZS4793 Licence ACS 3004
- WSAA PA 1018



SUITABLE FOR - PVC-U							
DN	OD (mm)	E-LIP SEAL OR O-RING	TAPPING SIZE (BSP)				
			20mm (3/4")	25mm (1")	32mm (1 1/4")	40mm (1 1/2")	50mm (2")
40	48	O-Ring	✓	✓	-	-	-
50	60	O-Ring	✓	✓	-	-	-
80	89	E-Lip	✓	✓	✓	✓	✓
100	114	E-Lip	✓	✓	✓	✓	✓
150	160	E-Lip	✓	✓	✓	✓	✓
155	168	O-Ring	-	✓	-	-	✓
195	218	O-Ring	-	✓	-	-	✓
200	225	E-Lip	✓	✓	✓	✓	✓
300	315	E-Lip	✓	✓	✓	✓	✓

SERIES 2 TAPPING BANDS

Design Advantage

- Quick and easy installation
- Positive stop to prevent overtightening
- Superior corrosion protection



Technical Detail

Range	DN100 to DN300
Pressure	PN16
Temperatures	40°C
Applications	Potable Water, Recycled Water
Pipe Material	PVC-M, PVC-O, Ductile Iron, Asbestos Cement
Colours	Blue and Purple

Compliance

- AS/NZS4793 Licence ACS 3004
- WSAA PA 1018



SUITABLE FOR - PVC-M, PVC-O, DUCTILE IRON, ASBESTOS CEMENT PIPE

DN	OD (mm)	E-LIP SEAL OR O-RING	TAPPING SIZE (BSP)				
			20mm (3/4")	25mm (1")	32mm (1 1/4")	40mm (1 1/2")	50mm (2")
100	122	E-Lip	✓	✓	✓	✓	✓
150	177	E-Lip	✓	✓	✓	✓	✓
200	232	E-Lip	✓	✓	✓	✓	✓
225	259	E-Lip	✓	✓	✓	✓	✓
250	286	E-Lip	✓	✓	✓	✓	✓
300	345	E-Lip	✓	✓	✓	✓	✓

HDPE TAPPING BANDS

Design Advantage

- Quick and easy installation
- Positive stop to prevent overtightening
- Superior corrosion protection



Technical Detail

Range	DN63 to DN315
Pressure	PN16
Temperatures	40°C
Applications	Irrigation, Potable Water, Recycled Water
Pipe Material	HDPE 100
Colours	Black and Purple

Compliance

- AS/NZS4129 Licence ACS 3004
- WSAA PA 1019



SUITABLE FOR - HDPE PIPE							
DN	OD (mm)	E-LIP SEAL OR O-RING	TAPPING SIZE (BSP)				
			20mm (3/4")	25mm (1")	32mm (1 1/4")	40mm (1 1/2")	50mm (2")
63	63	E-Lip	✓	✓	-	-	-
90	90	E-Lip	✓	✓	✓	✓	✓
110	110	E-Lip	✓	✓	✓	✓	✓
125	125	E-Lip	✓	✓	✓	✓	✓
160	160	E-Lip	✓	✓	✓	✓	✓
180	180	E-Lip	✓	✓	✓	✓	✓
225	225	E-Lip	✓	✓	✓	✓	✓
250	250	E-Lip	-	-	-	-	-
315	315	E-Lip	✓	✓	✓	✓	✓



DAEMCO
daemco.com.au 03 9863 6838
2 / 7-9 Clarissa Street, Campbellfield, 3061

**PARTNERING WITH OUR
CUSTOMERS TO DELIVER
END TO END SOLUTIONS**



www.daemco.com.au



VALVES



COUPLINGS



ACCESSORIES



PE DI FITTINGS



COVERS



BANDS

Head Office: Ground Floor. 215 Bell Street, Preston VIC 3072

Phone: +61 3 9863 6838 | Email: enquiries@daemco.com.au

Follow us on **LinkedIn**

©Copyright 2018. All Rights Reserved. Daemco Australia reserve the right to change designs and specifications without notice, warranties for suitability for use, liability or loss, damage or costs incurred relating to this information is excluded.